

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**


Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

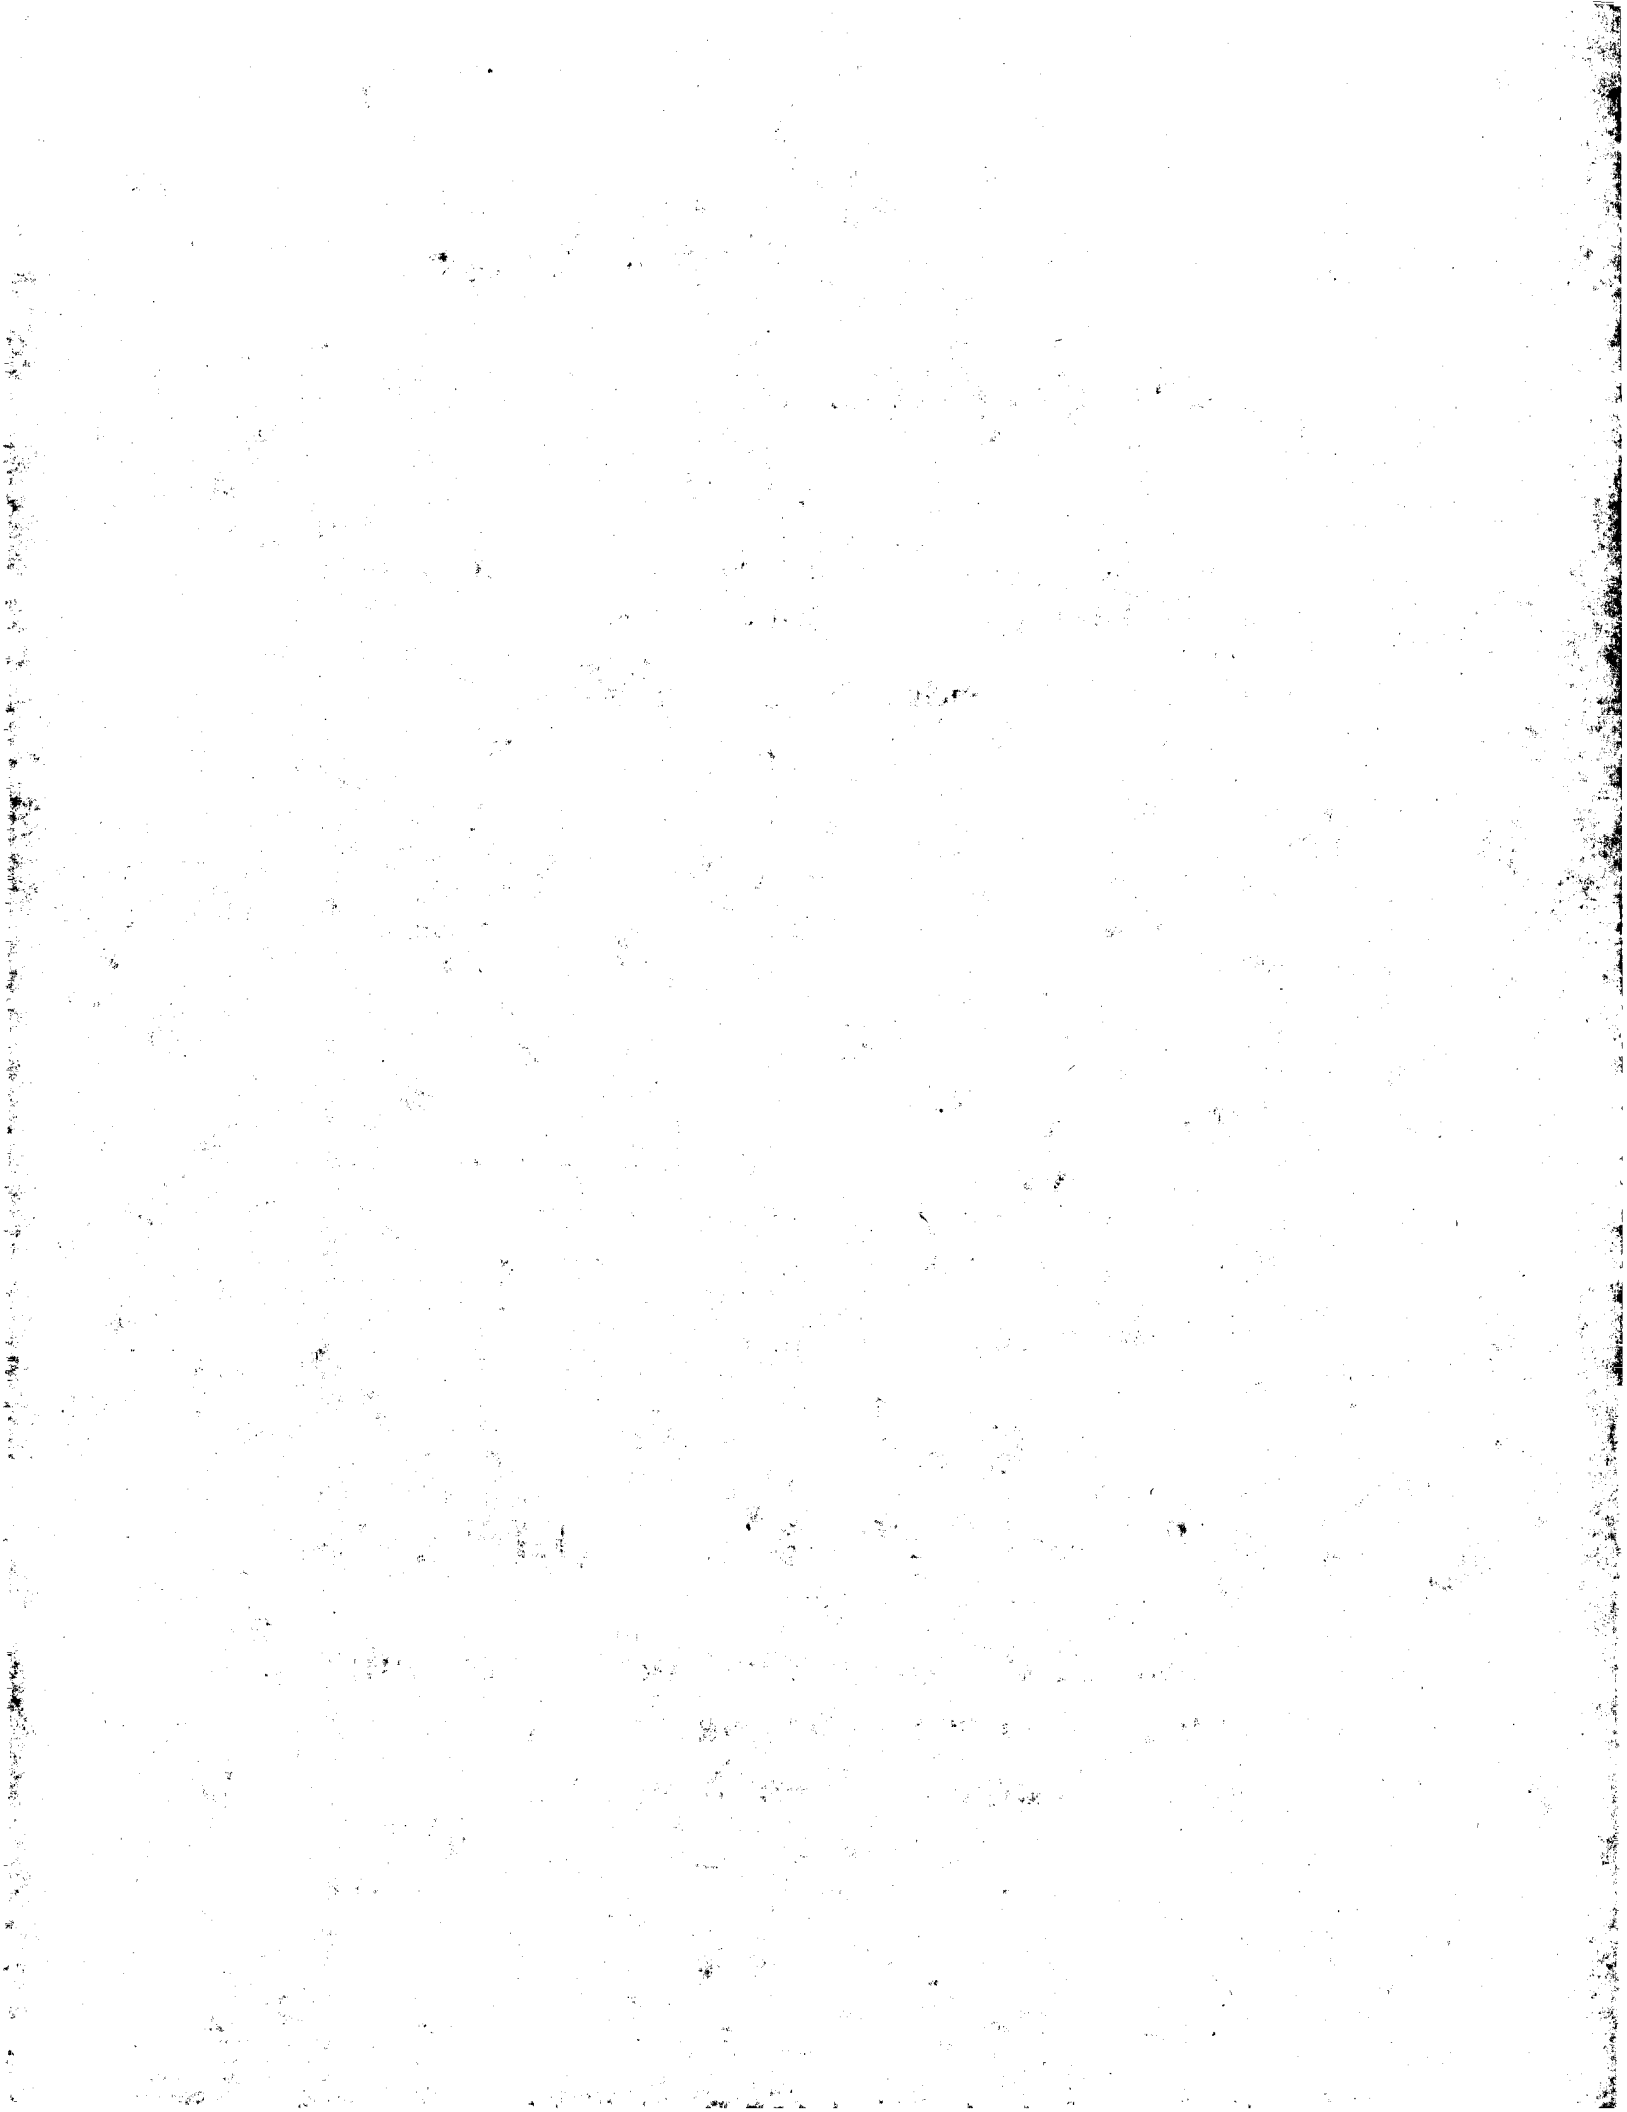







INVESTOR IN PEOPLE


The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

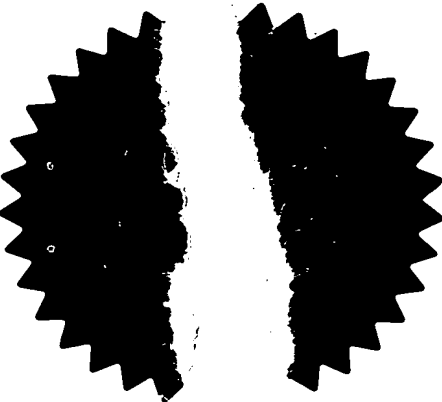

Signed *Stephen Handley*  
Dated 26 November 2003



# Patents Form 1/77


Patents Act 1977  
(Rule 16)



20NOV02 09:48:53 D00345  
P01/7700 100-0227040.3

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

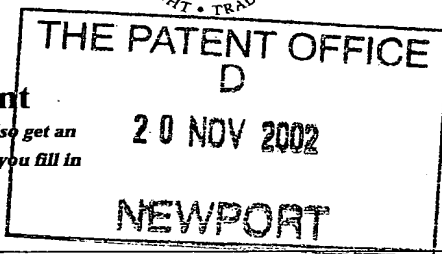

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

AT-G33191

2. Patent application number

(The Patent Office will fill in this part)

0227040.3

20 NOV 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Patents ADP number (*if you know it*)

If the applicant is a corporate body, give the country/state of its incorporation

(1) Conrad SEXTON  
Woodnook Barn  
Upper Pikeley Farm  
Long Lane, Allerton  
Bradford, BD15 8AQ

8509630001

(2) Simon MALLAS  
Manor Vale  
Riding Hill  
Shelf, Halifax  
HX3 7TS

8509655001

4. Title of the invention

Greetings Card

5. Name of your agent (*if you have one*)

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

Bailey Walsh & Co  
5 York Place  
Leeds  
LS1 2SD

Patents ADP number (*if you know it*)

224001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number  
(*if you know it*)

Date of filing  
(*day / month / year*)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(*day / month / year*)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

No

## Patents Form 1/77

8. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 10

Claim(s)

Abstract

Drawing(s) 4

8  
44

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents  
(*please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

*Be...*

19. 11. 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

A Tomkinson  
0113 243 3824

### Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*



## Greetings Card

This invention relates to a greetings card.

Conventional greetings cards typically comprise a blank made from sheet material, typically card material, which is folded in half to provide an outer front and back surface and an interior front and back surface. A picture or design is typically provided on the outer front surface and a greeting or message is provided on one of the interior surfaces, which a user is able to read when the card is opened. Such greetings cards typically provide only limited interest to a user and have limited aesthetic appeal.

In an attempt to increase the interest of a greetings card to a user, it is known to provide means for allowing an audio sound, message or tune to be played when the user opens the card. The audio message is played on activation of a switch caused by a user opening the card. Whilst such cards are likely to be of greater interest to a user, they still provide only limited aesthetic appeal. In order to increase the aesthetic appeal of a greetings card, it is known to provide light emitting diodes (LEDs) therein. However, the LEDs are typically fragile and can be broken easily on delivery of the card in the post or during use of the card. In addition, they allow illumination of only a small surface area of the greetings card and, if a plurality of LEDs are used to illuminate a wider surface area, each LED has to be mounted separately and requires individual wiring, thereby making the end product expensive, time consuming to manufacture and bulky in size.

It is therefore an aim of the present invention to provide a greetings card which overcomes the abovementioned problems, which has an improved aesthetic appeal to a user and which provides greater interest to the user.

According to a first aspect of the present invention there is provided a greetings card, said greetings card comprising at least first and second panels, said panels movable between a closed position wherein said panels are adjacent to each other and an open position wherein the panels are a spaced distance apart, and characterised in that electroluminescent means are provided on said greetings card.

The electroluminescent means are typically in the form of light emitting polymers (LEPs) which are illuminated on application of an electrical charge thereto. As such, when the LEPs are illuminated, the greetings card is provided with an improved aesthetic effect which provides greater interest to a person viewing the card. The LEPs are typically provided on sheet material by a printing process which is well known in the art and does not form part of this invention.

The LEPs are provided in the form of an LEP display and the LEP display is illuminated upon activation of an electrical supply thereto.

In one embodiment illumination of the LEP display is controlled by switch means which are moved between on and off conditions upon manipulation of the card between said open and closed positions.

The open and closed positions which activate/deactivate the switch can be determined by the distance or angle of separation of the panels.

In a further embodiment the LEP is activated on detection of one of more pre-defined criteria. The pre-defined criteria can

include any or any combination of detection of movement, light, sound, temperature and/or the like.

By limiting the activation of the illumination of the LEP to the occurrence of pre-defined criteria, such as light, sound and/or movement, the life of the power supply is extended by preventing illumination in certain conditions. In addition, the requirement for pre-defined criteria to be present can increase the interest of the user in the card.

Preferably movement detection means are provided on the greetings cards for detecting movement of the card, such as for example the card being picked up, and/or movement in the vicinity of the card, such as for example a person walking in front of the card.

Preferably the movement detection means is the form of a movement sensor.

Further preferably the light detection means is in the form of a light sensor.

Preferably the sound detection means is in the form of an audio sensor. For example, if a user whistles or makes a noise in the vicinity of the sensor, the LEP on the greetings card can be activated and be illuminated.

Preferably the LEP is located in at least one aperture defined in the card, thereby allowing illumination of the LEP to be visible through the aperture. Alternatively, or in addition to, the LEP can be located on a surface of the card.

The at least one aperture can be provided in a required design or shape and the LEP can either be provided of such dimensions so

as to overlap the edges defining the aperture or the LEP can be provided of a required design or shape which is visible through the aperture. In whichever embodiment used, the resulting effect is that the LEP typically illuminates a particular design or shape when activated.

In one embodiment the LEP can be provided on both surfaces of the sheet material, thereby allowing illumination of the LEP to be visible through the aperture from the front of the card and when the user is viewing the interior of the card.

Preferably the at least two panels are formed from a blank and are defined by fold lines, the fold lines allowing movement of the panels thereabout. However, the card can be formed from separate panels joined together by adhesive or other conventional means.

Preferably a further panel is provided which is located over the electrical circuitry to hide the same from view. The further panel is typically secured to the at least first or second panels by securing means.

The securing means can include any or any combination of adhesive, clips, staples and/or the like.

Preferably the electrical circuitry includes at least an electrical power supply, such as a battery, electrical connections, such as wiring loom, an inverter and switch means to allow illumination of the LEP to be activated/inactivated.

In one embodiment the inverter or sequencing means can be used to allow the LEP to be illuminated in a pre-determined sequence. For example, the LEP can be made to flash on and/off at pre-determined time intervals, fade and/or the like.

In one example, the LEP can be programmed to fade in and out of sequence, thereby providing an improved aesthetic effect.

The inverter can be a wire wound inverter or chip wound inverter but the latter is most preferable due to the small dimensions of the same.

In a further embodiment a frequency adaptor is provided for use with illuminating the LEPs. By adjusting the frequency at which the LEPs are switched on/off, the colour of the LEPs can be adjusted accordingly. Thus, a variety of different colours can be provided without the requirement for separate coloured LED bulbs to be used, as would be the case with conventional greetings cards.

If two or more LEP displays are provided, a plurality of switches can be provided to control illumination of the same. Alternatively, or in addition to, a double switch can be provided to allow activation of one or more of the displays and deactivation of others when first pre-defined criteria are met, and vice versa depending on the operational conditions of the switches.

In one embodiment, a first switch is provided to activate the LEP when the panels are moved a first pre-determined distance or angle apart. Activation of the LEP typically moves the LEP into a first condition. A second switch is activated when the panels are moved to a second pre-determined distance or angle apart. Activation of the second switch typically causes a change in condition of the LEP or further LEPs.

Preferably the blank is formed from a sheet material, such as card stock.

Preferably the LEP and electrical components allowing illumination of the LEP can be formed as a single unit for location in/on the greetings card/blank. The single unit can then be connected to a power supply before location with the greetings card or after location therewith.

According to a second aspect of the present invention there is provided a greetings card including an electroluminescent means which is illuminated upon detection of a pre-determined level of light, sound and/or detection of movement.

The advantages of the present invention are that an LEP display is lighter in weight than conventional LEDs. The LEP display can be printed easily onto the greetings card, thereby reducing the time and cost of manufacturing the card. In addition, LEPs can be used to create a greater range of designs due to the larger surface area that can be illuminated and the ease with which the colour of the illuminated display can be changed.

Embodiments of the present invention will now be described with reference to the accompanying figures wherein:

Figures 1a and 1b illustrate a greetings card according to an embodiment of the present invention;

Figure 2a and 2b illustrate a greetings card according to an embodiment of the present invention in which a motion sensor is provided;

Figure 3a and 3b illustrate a greetings card according to an embodiment of the present invention in which a motion sensor and a light sensor are provided; and

Figure 4a and 4b illustrate a greetings card according to a further embodiment of the present invention.

Referring to figures 1a and 1b, there is illustrated a greetings card 2 in the form of a blank made from sheet card material. The blank comprises end panels 4 and 6 and a middle panel 8. The panels 4, 6 and 8 are defined by fold lines 10 and 12.

When the card is formed, the front of the greetings card is provided by front surface 14 of middle panel 8, as shown in figure 1b. An aperture is defined in the front panel 8 and an LEP element 16 is located therein in a required design. In this example, the LEP element is in the form of a number to represent the age of a person to whom the greetings card is to be given.

The back surface 18 of the middle panel 8 is provided with power means in the form of a battery 20, a switch mechanism 22, an inverter or flasher unit 24 and connections 26, 28, 30 and 32 therebetween. These electrical components are typically formed as a single unit prior to location on the greetings card.

The battery 20 provides electrical charge for activating the LEP display element and causing the same to luminesce. The switch mechanism 22 comprises a sliding arm 34, which has a first end 36 attached to the switch 38 and a second end 40 attached to panel 6. A pair of conductive areas (not shown) are provided in the switch and the sliding arm 34 acts as a conductive shorting member. When panel 6 is moved in a direction away from middle panel 8, sliding arm 34 moves to a position wherein the sliding arm 34 contacts the conductive areas to complete the circuit, thereby moving the switch to an on condition and allowing illumination of the LEP display. When panel 6 is moved in a direction towards middle panel 8, sliding arm 34

) moves to a position wherein the sliding arm is out of contact with the conductive areas, thereby moving the switch to an off condition such that the LEP is no longer illuminated.

The battery 20 is connected to inverter 24 via connection 26 and allows illumination of the LEP element 16 according to a pre-determined sequence, such as flashing of the LEP element. However, it is noted that the inverter is not necessarily required and a continuous electrical charge can be provided from the battery to the LEP element 16 to illuminate the LEP continuously when the switch is in an on condition.

The connections 26, 28, 30, 32, switch mechanism 22, inverter 24 and battery 20 are typically of such dimensions that they do not substantially protrude from the surface of middle panel 8. When the card is constructed, end panel 4 is folded along fold line 10 and moved to a position adjacent back surface 18 of the middle panel, as shown by arrow 42. The end panel 4 is then adhered to middle panel 8 to maintain the same in position and to hide the electrical connections.

Thus, when constructed the end panel 6 forms the back of the greetings card and middle panel 8 forms the front of the greetings card. When the card is opened and the switch is moved to an on condition, the LEP element 16 is illuminated. When the card is closed, the switch is moved to an off condition and the LEP is not illuminated.

There is typically a pre-determined point or angle of separation of end panel 6 from middle panel 8 at which the switch is moved from the on condition to the off condition. The point is determined by the manufacturer but is typically provided to allow the LEP element to illuminate when the card is located in an upright and partially open position, as shown in figure 1b.



Alternatively, operation of the switch may be allowed only when the card is in a fully open position.

Referring to figures 2a and 2b, a similar greetings card arrangement is provided to that in figures 1a and 1b. In this embodiment a motion sensor 44 is provided on panel 8. Any movement in the vicinity of the greetings card is detected by motion sensor 44 and this activates the LEP to illuminate, irrespective of the switch/sliding arm position. As such, any person approaching the card or walking past the card will activate illumination of the LEP.

The motion sensor 44 is typically connected to inverter 24 by connection 46.

In a further embodiment, as shown in figures 3a and 3b, a light sensor 48 is provided in addition to, or as an alternative to motion sensor 44. Since the LEP may not be visible in bright sunlight and will be most effective when there is little or no sunlight, such as at night time or in a low lit room, the light sensor activates LEP illumination when a pre-determined light level is detected.

The light sensor is typically connected to inverter 24 via connection 50. The light sensor can work in combination with motion sensor 44, such that the LEP is illuminated only when motion is detected in the vicinity of the card and a pre-determined light level is detected. Thus, in addition to being able to activate LEP illumination by opening the card to a substantially fully open position, the LEP is activated typically in a low lit or dark room when motion, such as a person walking past the card, is detected.

Figures 4a and 4b illustrate a yet further embodiment of the present invention in which a further switch mechanism 52 is provided. This additional switch mechanism 52 is used to activate a further LEP element 54 provided in a required design, which in this example is a "Happy Birthday" message, on the inside surface of the card on end panel 6.

The switch mechanism 52 is in the form of a double switch which is able to activate LEP elements 16 and 54 in combination or can be used to divert electrical power from the external LEP element 16 to the internal LEP element 54. When the greetings card is opened, the switch 22 operates in the normal manner. If the greetings card is opened beyond a certain pre-defined angle, for example 100 degrees, the second double switch 52 breaks the circuit to the external display LEP element 16 and completes the circuit to the internal display LEP element 54, thereby illuminating the same. Thus, the required LEP element can be illuminated depending on whether the user is viewing the exterior of the card or the interior of the card.

It will be appreciated by persons skilled in the art that manual activation of the switch to result in illumination of the LEP display(s) can be provided at any time.

Thus it can be seen that the present invention provides a greetings card with improved aesthetic appeal which is likely to provide greater interest to the user.

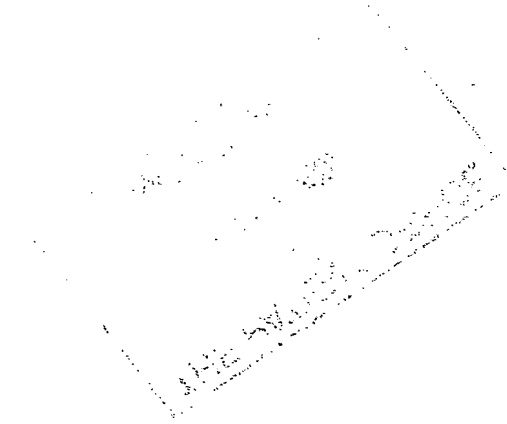


Figure 1a

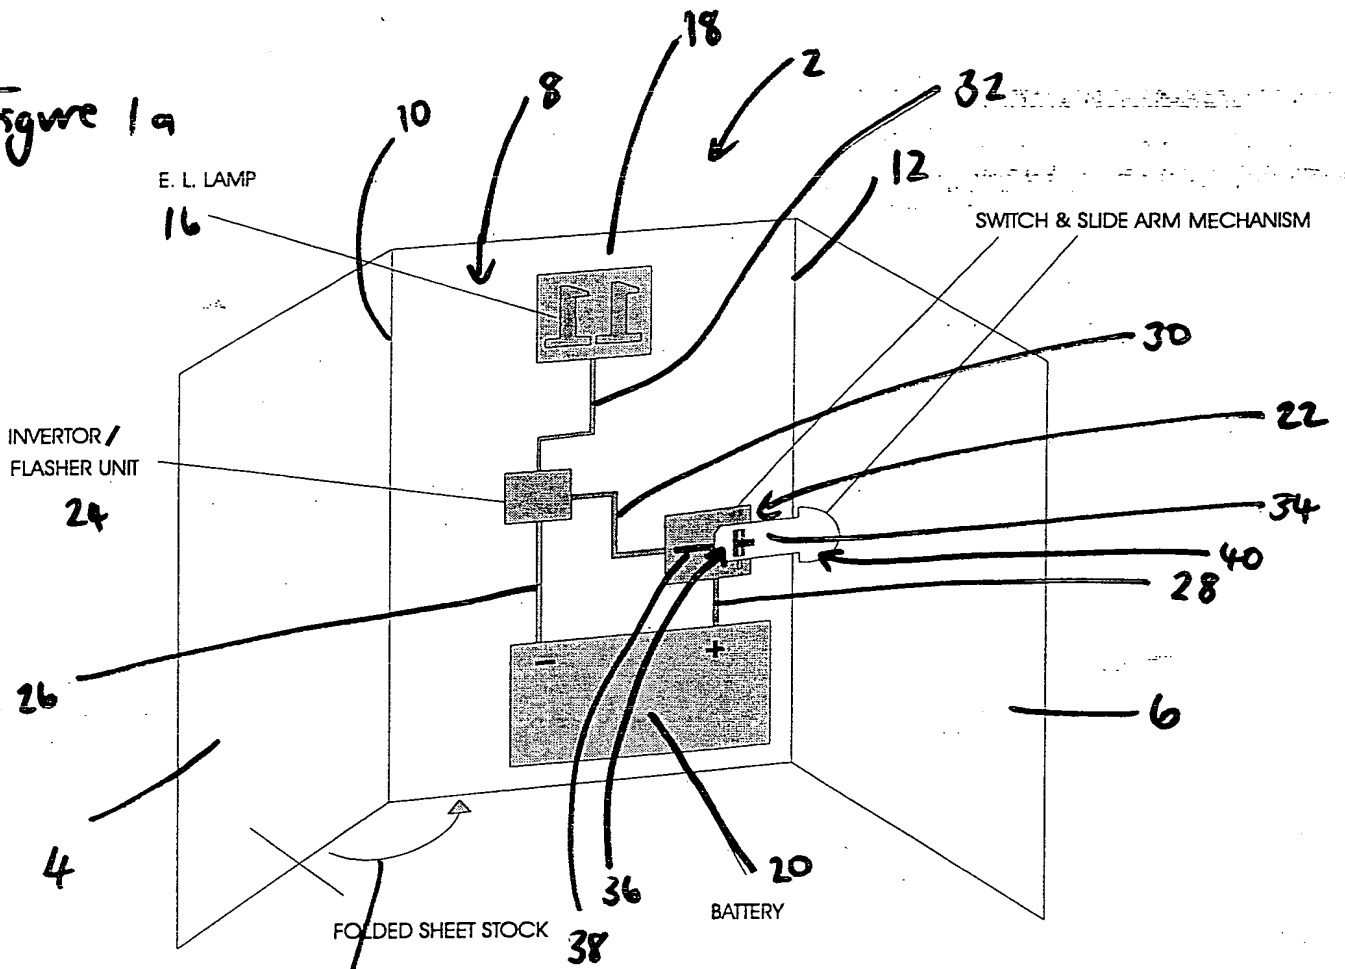


Figure 1b

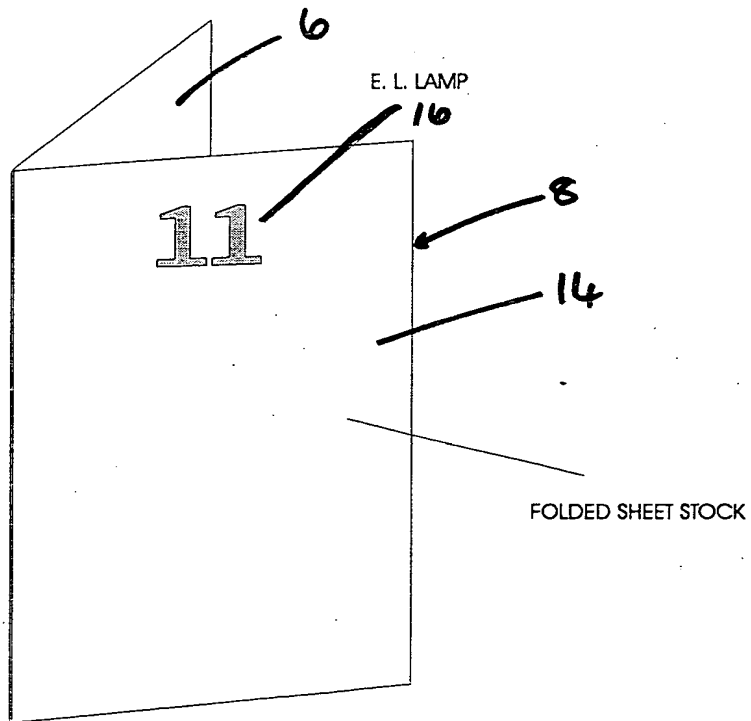




Figure 2a

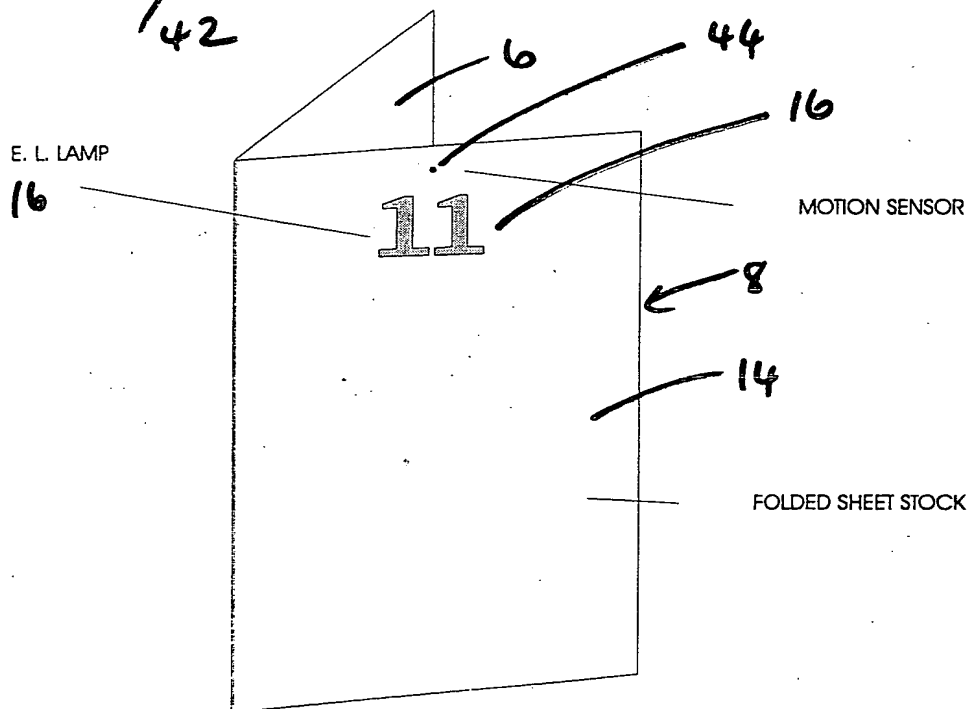
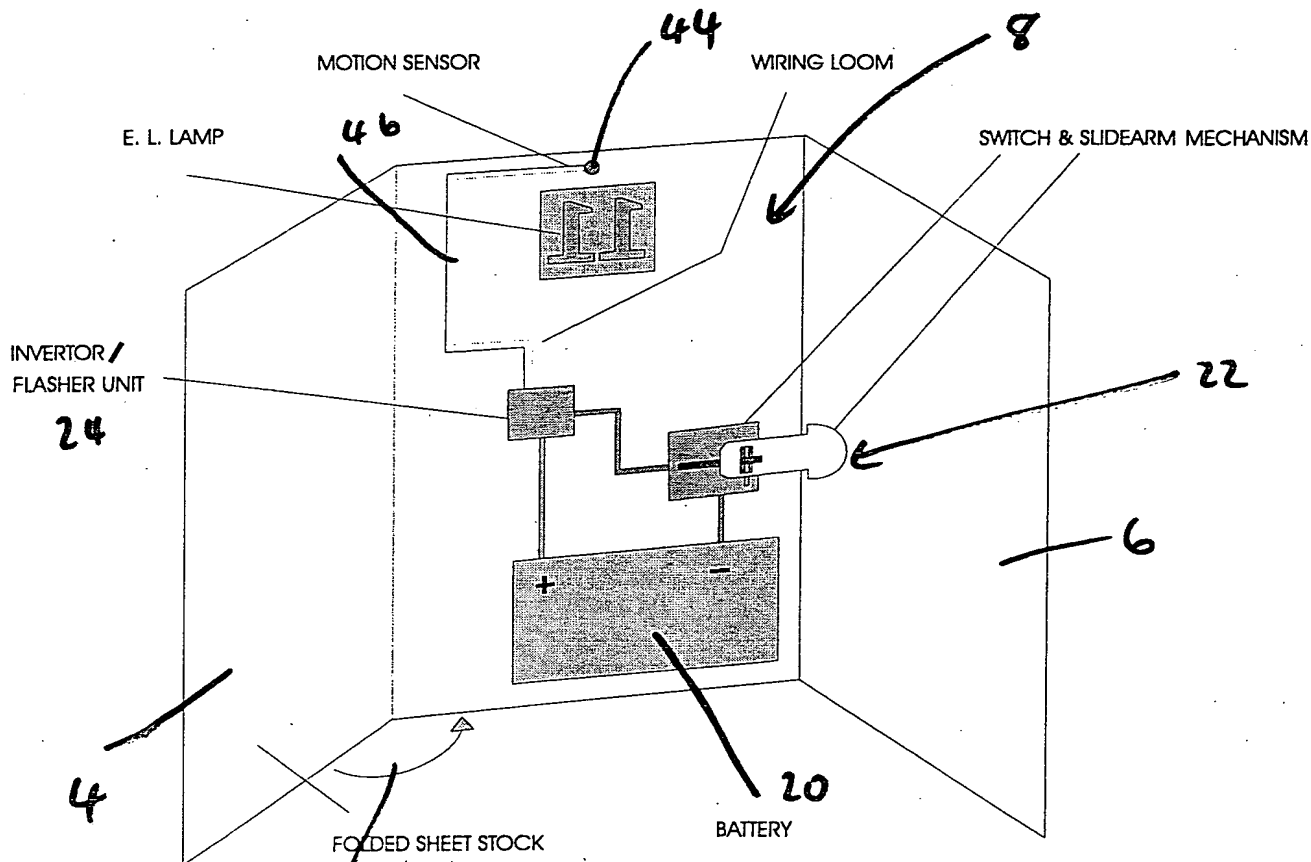


Figure 2b



Figure 3a

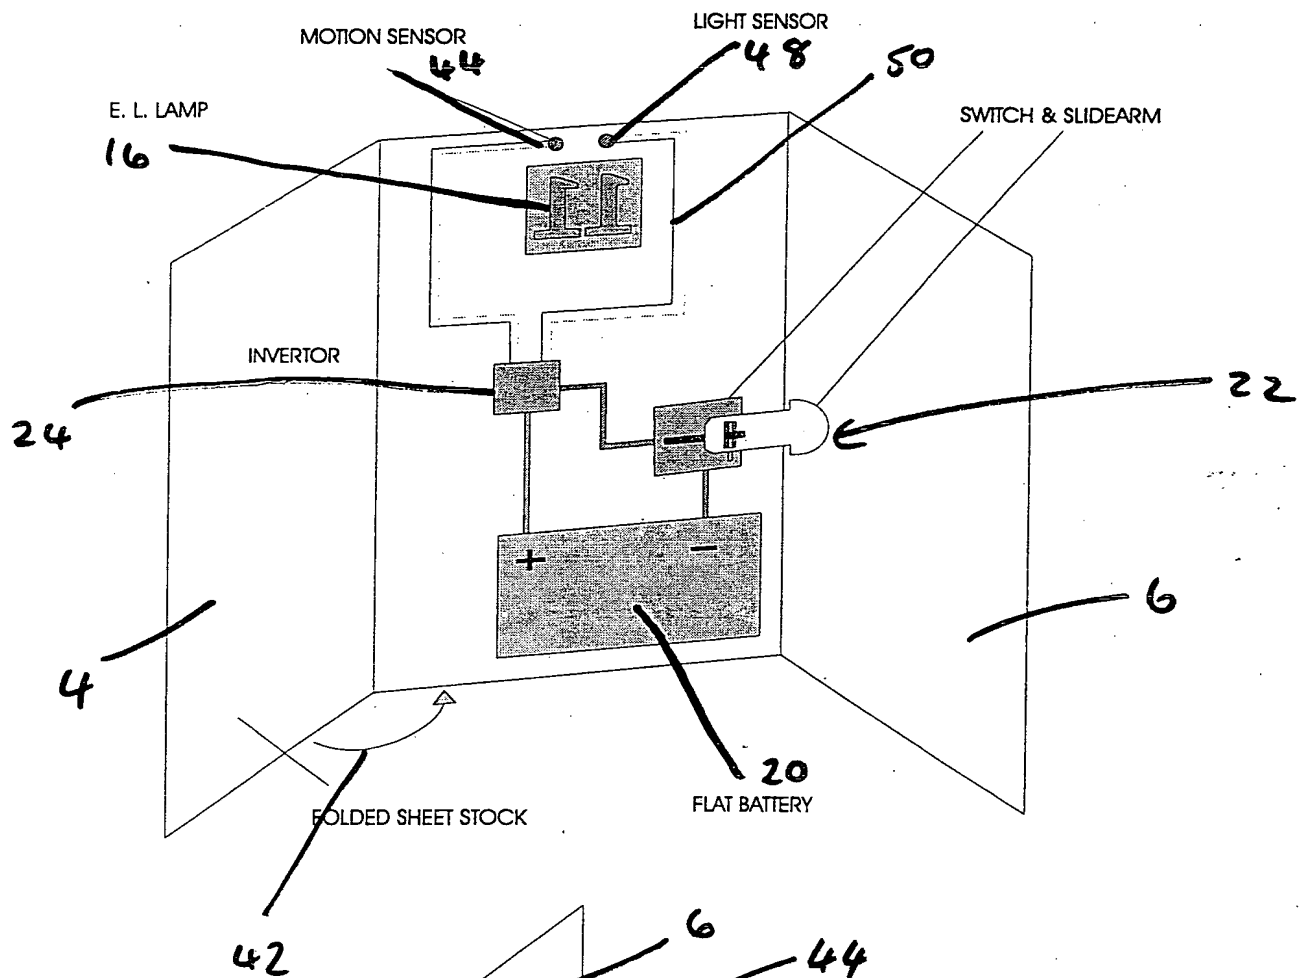
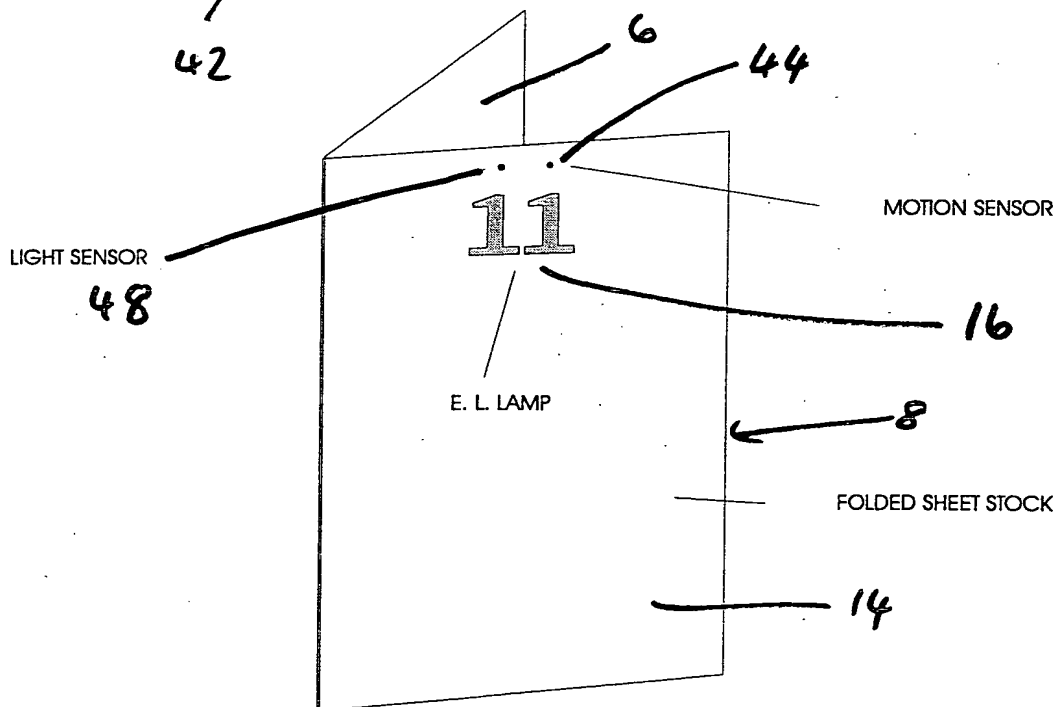


Figure 3b



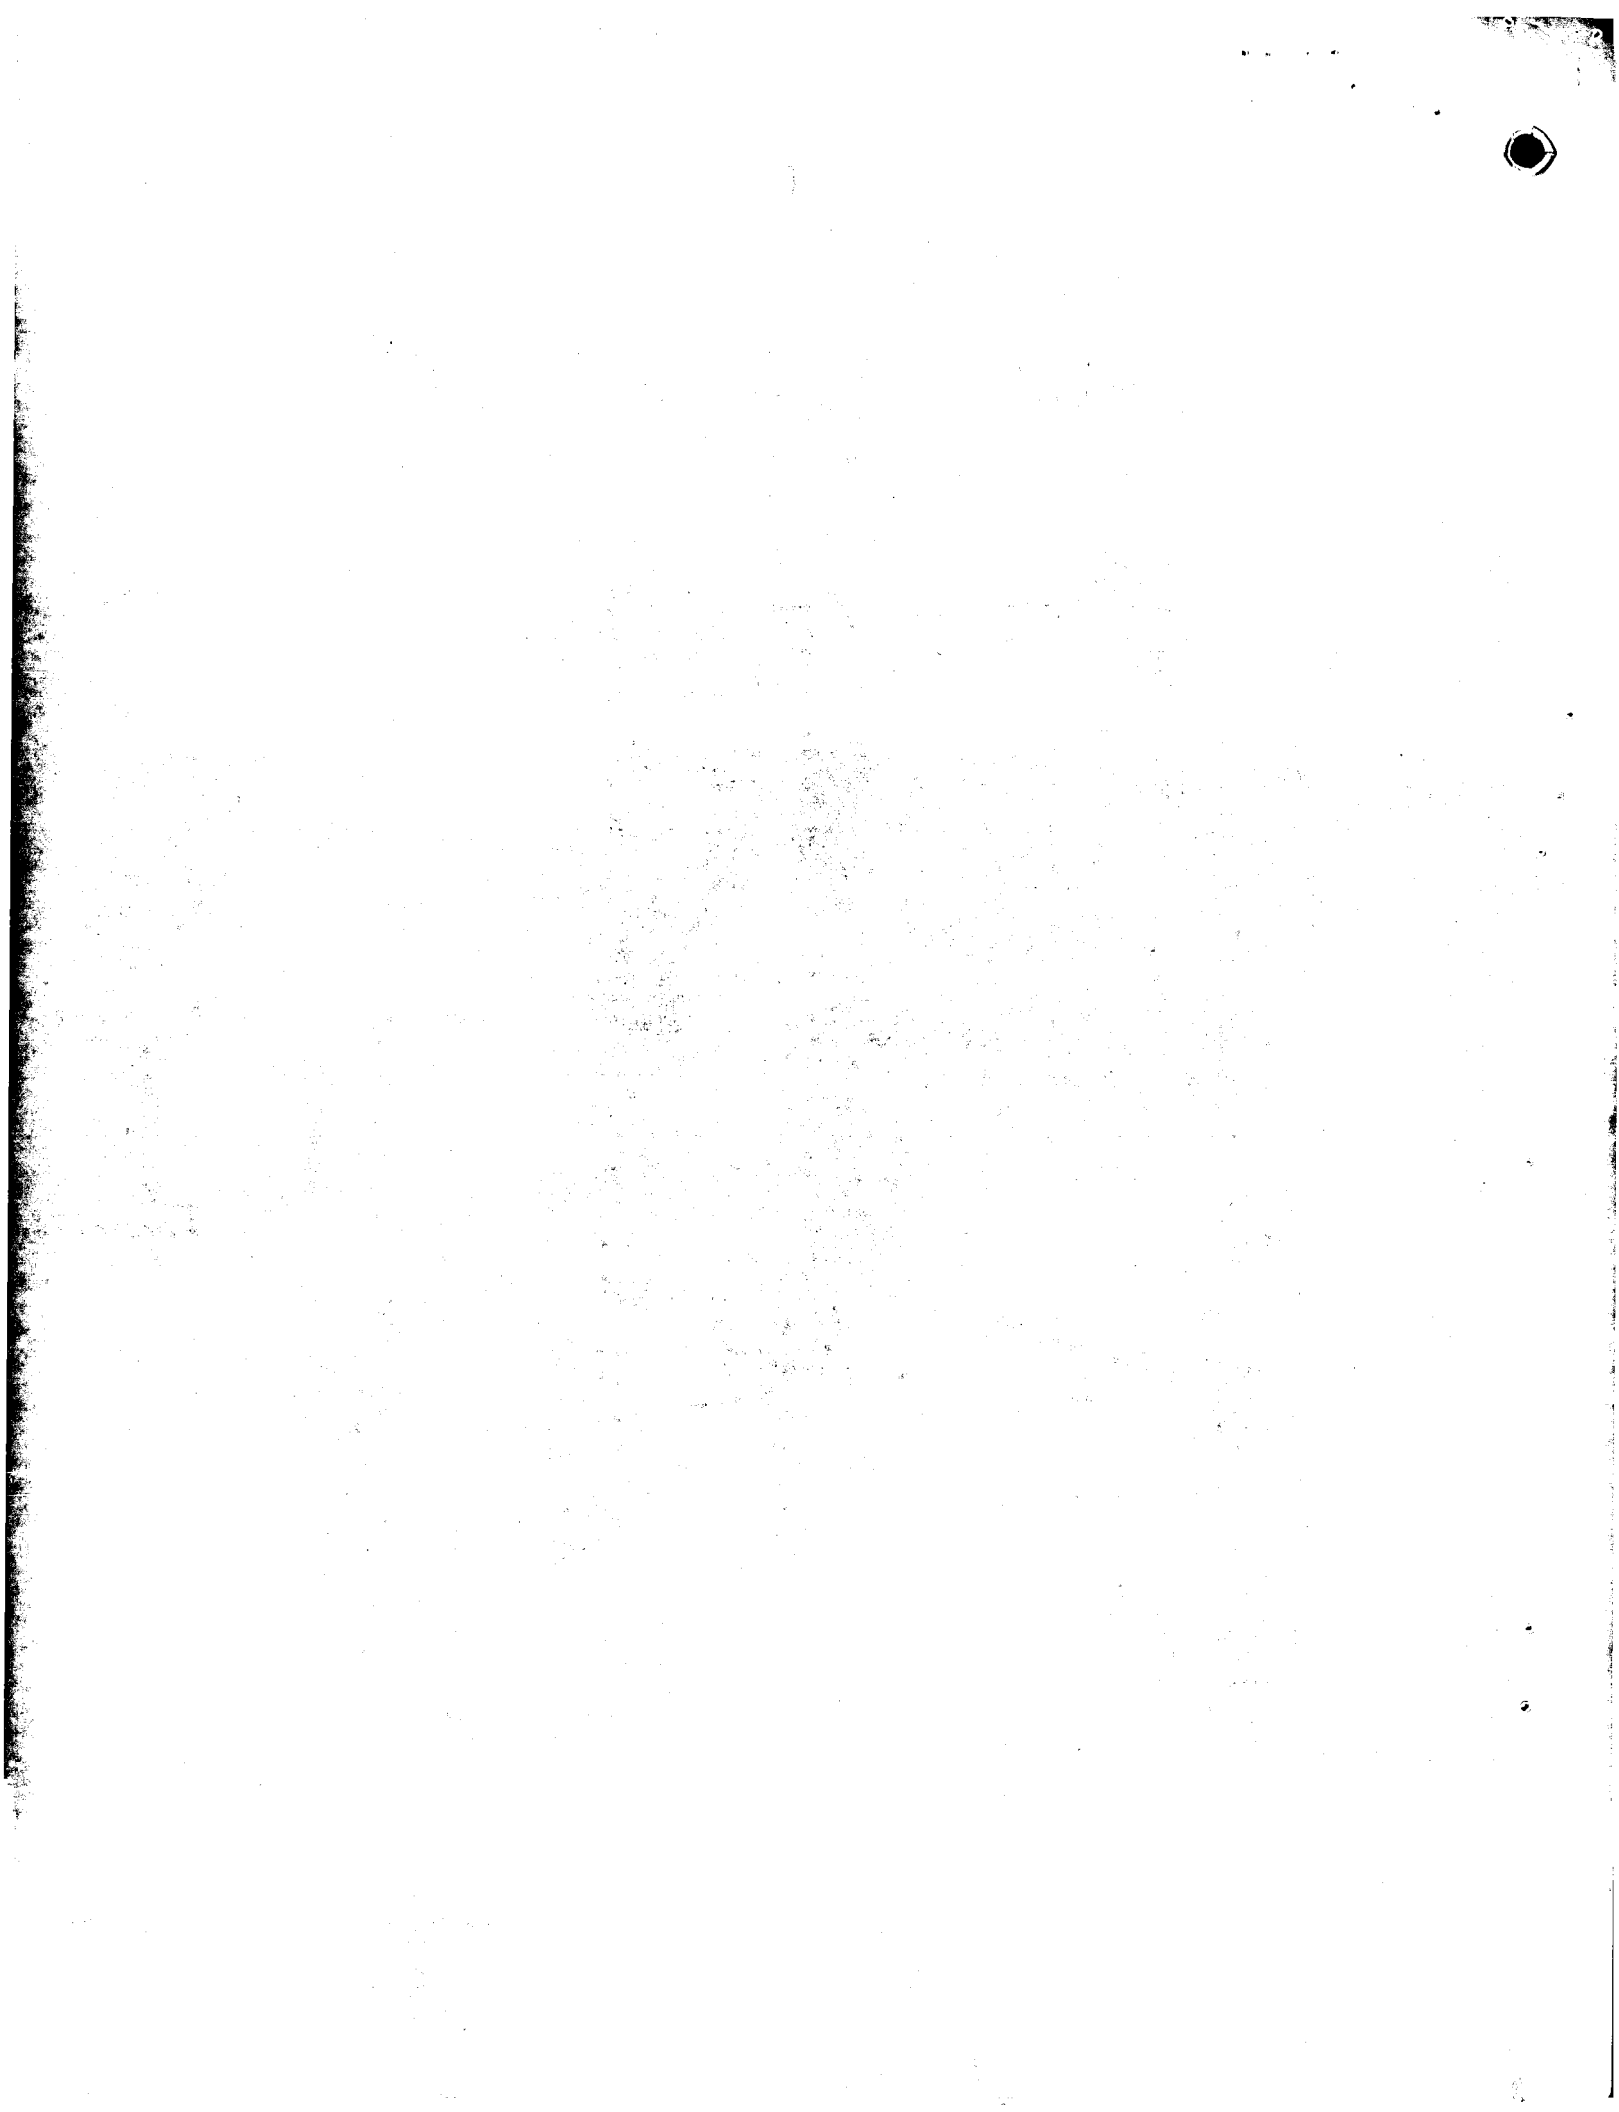




Figure 4a

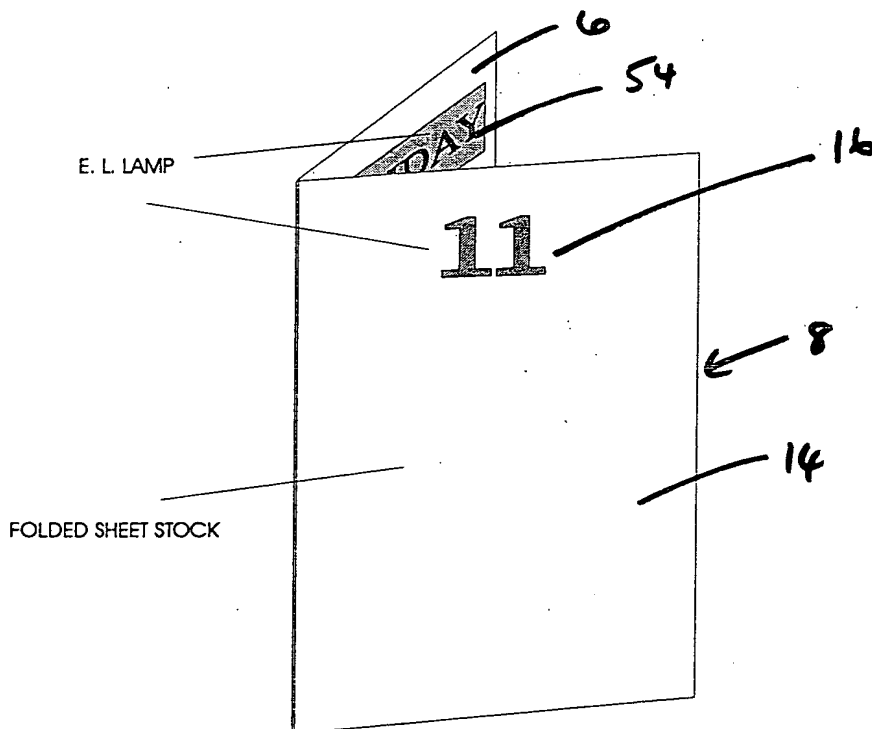


Figure 6b

